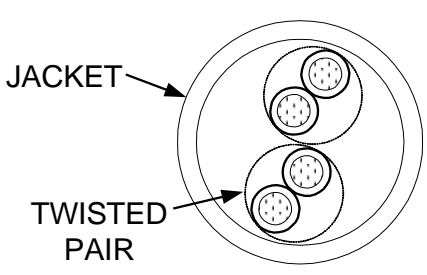


**Bulk Cable Specification**

**TC2380 Category 5e Cable**

<p>Cross-Sectional View</p> 		<p>Color Code</p> <p>Pair 1. Blue, White/Blue</p> <p>Pair 2. Orange, White/Orange</p>
ITEM		DESCRIPTION
Conductor	No. of Conductors	2 Twisted Pairs
	Material	Tinned copper
	Construction	24 AWG 7/32
Insulation	Material	High Density Polyethylene
	Nominal Diameter	.039"
Jacket	Material	PVC
	Nominal Wall Thickness	.023"
	Nominal Diameter	.200"
	Color	Beige
<p>Marking: QUABBIN DATAMAX PATCH CORD/JUMPER 5210--(UL) TYPE CM 24 AWG 75C—CSA LL51726—TYPE CMG 60C—ETL VERIF. TIA-568-C.2 CAT 5e—RoHS (LOT DESIGNATOR) (SEQUENTIAL FOOTAGE)</p>		
<b>ELECTRICAL PROPERTIES</b>		
Conductor Resistance	26.0 Ω/100 meters	
Mutual capacitance	13.5pF/ft at 1MHz	
Impedance	100Ω ± 15Ω 1-350 MHz	
<b>LISTINGS / RATINGS</b>		
NEC (UL) Type CM, CSA Type CMG, ETL Verified TIA-568-C.2, RoHS		
Temperature Rating, MAX: +60°C & +75°C		